

Everled Up/Down Linear LED 8ft

80W LED Panel Suspended Direct/Indirect 8ft

UDP8-DM-40E-WH

UDP8-DM-40E-BL



SPECIFICATION


Performance Summary

The suspended EVERLED Up/down LED Luminaire is a commercial pendant lighting fixture utilizing an advanced LED optical system to achieve superior performance. The unique design is nearly transparent luminaire when off and excellent uniformity and efficiency when on, reaching 55% downlighting and 45% uplighting distribution, making the illusion of the light floating in mid-air, included UL Recognized constant current driver which support 0-10V dimming and step dimming, suitable for indoor lighting.

Dimension

A: 94.48" / B: 7.87"

C: 0.94"

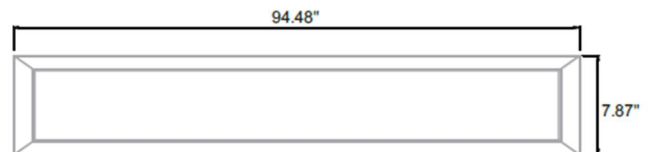

Features

Efficacy: 105LPW

Delivered Light Output: 8400Lumens

Input Power: 80Watts

CRI: Ra>80

DLC CCT Options: 3500K/4000K/5000K

Input Voltage: 100-277V AC

Input current: 0.43A

THD:<20%

Power Factor: >0.9

Driver output: DC30-42V,0.88A

Standard Warranty: 5 Years

Standard Lifetime: Designed to L70 minimum 50,000 hours

Mounting: Suspended

Support to connect 5 pcs panels together in 120V AC
support to connect 10 pcs panels together in 277V AC

Available 0-10v dimming and step dimming (100%,50%,10%-15%)

Signal Current: <2mA

Photometrics

